



# Resources

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**



# Samsung SMART Signage

## QMR / QMT series

Display any content in ultra-high definition with incredibly rich color on slim, efficient signage

Through intelligent UHD upscaling technology, Samsung's QMR and QMT series performs edge restoration and noise reduction to deliver UHD picture quality even with lower resolution content. As an added benefit, this series also features reliable, non-glare panels that provide better visibility from all angles. Backed by Tizen 4.0, this series provides reinforced capability with multiple web formats and secured protection. Additionally, its new slim design simplifies wall mounting and ensures seamless installation.


### Highlights

- Engage customers with lifelike images through ultra high-definition resolution
- Deliver UHD-level picture quality even with lower resolution content through Crystal Processor 4K supporting advanced UHD upscaling technology
- Dynamic Crystal Display allows viewers to enjoy a wider spectrum of colors, up to one billion shades
- Symmetrical, slim design simplifies installation and complements any environment
- Secure, PC-free operation through Knox and rigid three-layer protection
- Reliable, non-glare panels provide better visibility from all angles, anytime of day allowing businesses to deliver accurate information 24/7


# Industry trend

With visual display technology continually improving, viewers have developed an ever-growing expectation for better – and bigger – picture quality. Users, more than ever, want to captivate customers with truly lifelike images and gain a competitive edge over their industry peers with best-in-class displays. This is reflected in the fact that UHD resolution continues to grow in popularity, becoming an essential way for brands to impress customers amid a wider variety of stunning, aesthetical visuals and content. This trend is coupled with demand for larger screen sizes, particularly in the 75-inch and above category, enabling businesses to differentiate themselves and display content in a more impactful way than ever before.

## Ultra-high definition is the new normal \*

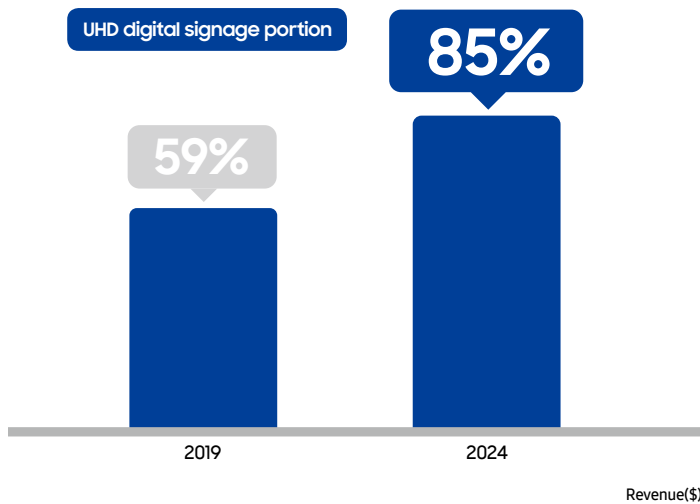

## Demand for bigger screens is on the rise \*\*


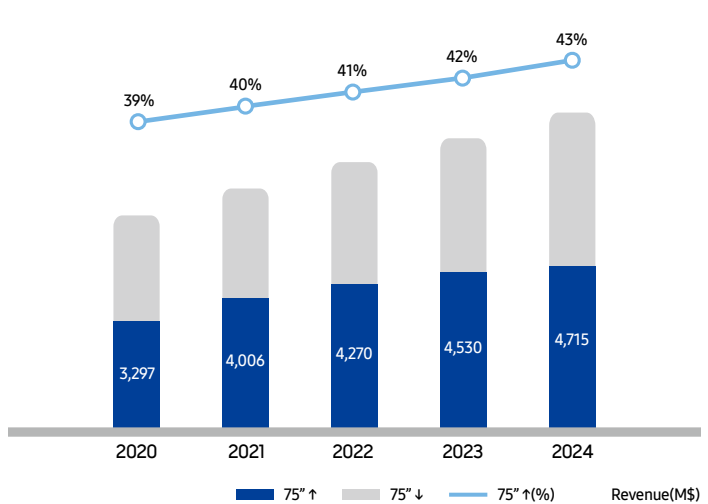


\*\*\* Source : Omdia, Public Displays Market Tracker Q1 2020, July 2020. Revenues in USD Millions. Does Not Include Consumer TVs Used as Public Displays. Not an Endorsement of Samsung Electronics Co. Ltd. Any Reliance on these results is at the third-party's own risk.


# Why Samsung's QMR / QMT series?

Samsung's superior visual display technology has positioned them as the industry leader in the digital signage market for a decade\* and Samsung brand having been No.1 in sales for 11 consecutive years in the display market\*\*. As an expert in picture quality in the display industry, Samsung is able to deliver best-in-class picture quality through their QMR and QMT series. The signage provides rich and flawless colors, sleek and durable design, powerful performance through SSSP 6 and secured protection. Samsung's QMR and QMT series is also able to upscale the low resolution content to UHD picture quality. For commercial displays, this technology advancement means highly visible signage with unmatched accuracy to help capture the attention of potential customers. It also means savings both in cost and time for businesses who can produce content more inexpensively at a lower resolution and still display it in stunning UHD quality.

\* Results based on Omdia(former IHS) report "Public Displays Market Tracker", 2009 – 2018. Information is not an endorsement of Samsung. Any reliance on these results is at the third party's own risk.  
 \*\* According to market research company "Omdia". Ranking in terms of shipments. Results are not an endorsement of Samsung. Any reliance on these results is at the third-party's own risk.



# Key features

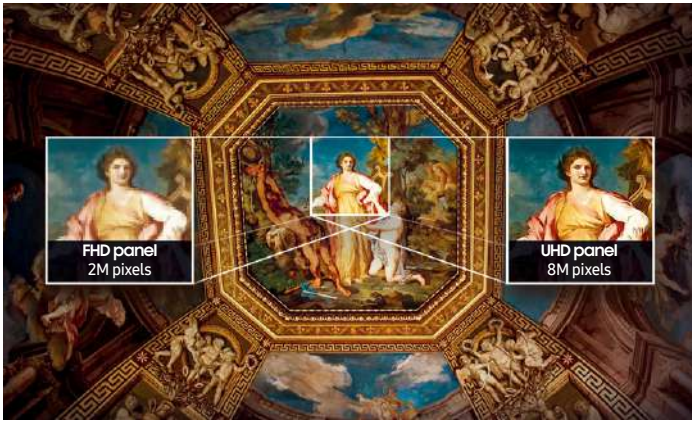


## Incredible 4K picture quality

Samsung's new QMR and QMT series is able to capture customer attention by providing an incredibly clear picture, showcasing lifelike images and intricate details better than ever before thanks to ultra high-definition 4K resolution.



## Perfect view with non-glare display

When clear visibility is essential, the QMR and QMT series incorporates key features including up to 500 nit brightness and reliable, non-glare panels that provide better visibility from all angles, anytime of day. The display is ideal for locations such as airports and commuter stations where 24/7 access to clear and accurate information is crucial.

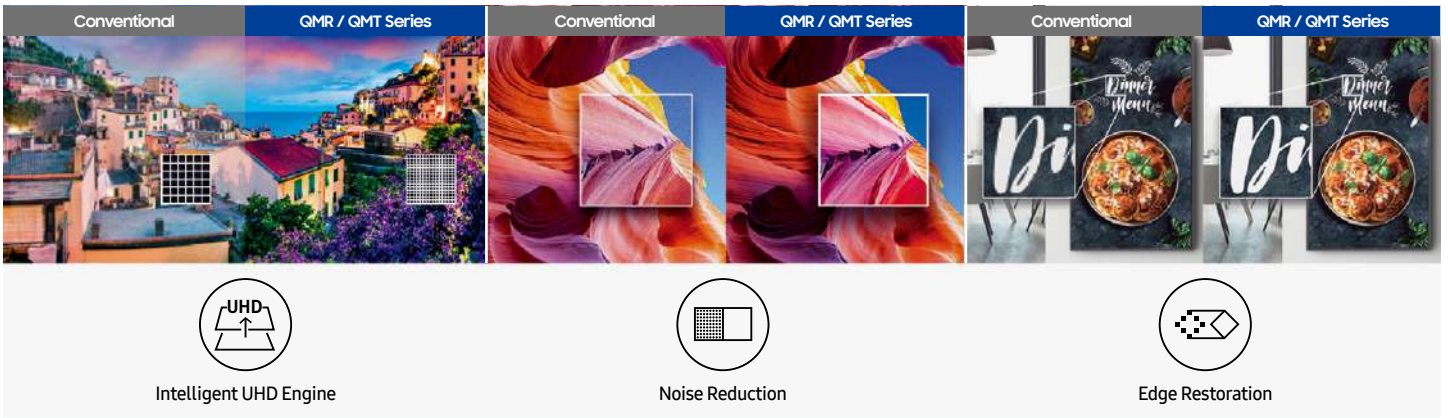

## Crystal Processor 4K

Samsung's global leadership in display technology and picture quality spans more than a decade. Thanks to superior semi-conductor technology, Samsung has developed the powerful video processor available. Additionally, intelligent UHD upscaling technology is a cutting-edge solution based on Samsung's proprietary UHD Processor that allows content developed at a lower resolution to be elevated to UHD-level quality. It also performs edge restoration and noise reduction to optimize on-screen text and imagery with crisp edges and fine detail.



## Dynamic Crystal Display


Dynamic Crystal Display is what brings the incredible, lifelike color to Samsung displays. Using 10-bit processing, the displays are able to showcase a wider spectrum of colors — up to a billion different shades — capturing subtle differences for flawless color expression, critical to businesses in ensuring brand consistency across communication channels. The QBR and QBT series also features HDR+ functionality that converts standard definition (SDR) content to HDR quality for sharper contrast and more vivid colors.

## Key features



### Slim and symmetrical design

The all-new slim and symmetrical design of the QMR and QMT series significantly simplifies wall mounting the display and ensures installation is a seamless process. The display's power inlet direction has been redesigned to sit flush against the wall. The new design sets guarantees a long life cycle ensuring the QMR and QMT series will stand the test of time.

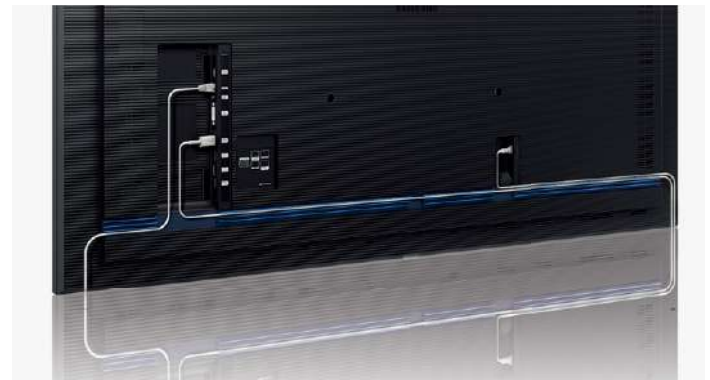

### Clean cable management

In a corporate or retail environment, the back of a display is often visible to customers. With the QMR and QMT series' new cable guide feature retailers can tuck messy cables away from view. This allows for a clean and more visually-appealing customer shopping experience.



### Samsung Workspace secured by Knox

Samsung Workspace is a powerful new feature fortified by proprietary Knox security technology allowing users to create an enhanced virtual collaboration workspace without needing a PC in the room, or any physical connection. Simply connect a keyboard and mouse to the display and immediately get to work accessing a PC remotely or web based cloud services such as Microsoft Office 365 and VMWare Horizon.

\* Samsung Workspace feature support may vary by region and market conditions.  
\* The scheduled availability of this feature varies by model.



### Powerful, all-in-one solution

The Samsung SMART Signage Platform (SSSP) is an open-source, all-in-one solution embedded in Samsung SMART signage that simplifies installation and maintenance. With SSSP, there is no need for any external devices to communicate with the server or play digital media enjoying easy development, reinforced capability with multiple web formats, and secured protection.



### Wi-Fi and Bluetooth built-in

The QMR and QMT series features a nearly endless range of business use cases thanks to built-in Wi-Fi and Bluetooth. Wireless connectivity allows for personalized and interactive services including enabling integration with beacon technology in store, while also simplifying how businesses showcase content.

\* Image is for illustrative purposes only, specific application or program may have to be developed for the depicted usage scenario.



### Industry standard certified

QMR displays are EMC class B compliant, providing a safe and healthy viewing environment by meeting strict standards of electromagnetic wave emission and assuring reliable operation even near other electronic equipment. The displays are also registered by EPEAT, the global ecolabel for IT, confirming the hardware is sustainable for the full product lifecycle, from design and production to energy use and recycling.

\* QM85R and QM98T have EMC class A certification and not registered by EPEAT.

# Specifications

| Model                           |                                |   | QM43R  | QM50R  | QM55R  | QM65R  | QM75R  |  |
|---------------------------------|--------------------------------|---|--|--|--|--|--|--|
| Panel                           | Diagonal Size                  | Class   | 43   | 50   | 55   | 65   | 75   |  |
|                                 |                                | Measured  | 42.5   | 49.5   | 54.6   | 64.5   | 74.5   |  |
|                                 | Type                           | Edge LED BLU  | Edge LED BLU   | Edge LED BLU   | Edge LED BLU   | Edge LED BLU   |  |  |
|                                 | Resolution                     | UHD (3840 x 2160)   | UHD (3840 x 2160)  | UHD (3840 x 2160)  | UHD (3840 x 2160)  | UHD (3840 x 2160)  |  |  |
|                                 | Pixel Pitch (mm)               | 0.2451 x 0.2451   | 0.285 x 0.285  | 0.315 x 0.315  | 0.372 x 0.372  | 0.42975 x 0.42975  |  |  |
|                                 | Active Display Area            | 941.184 (H) x 529.416 (V)   | 1095.84(H) x 616.41(V)   | 1209.6(H) x 680.4(V)   | 1428.48 (H) x 803.52 (V)   | 1650.24 (H) x 928.26 (V)   |  |  |
|                                 | Brightness(Typ.)               | 500   | 500  | 500  | 500  | 500  |  |  |
|                                 | Contrast Ratio (Typ.)          | 4000:1  | 4000:1   | 4000:1   | 4000:1   | 4000:1   |  |  |
|                                 | Viewing Angle(H/V)             | 178/178   | 178/178  | 178/178  | 178/178  | 178/178  |  |  |
|                                 | Response Time (G to G)         | 8ms(Typ.)   | 8ms(Typ.)  | 8ms(Typ.)  | 8ms(Typ.)  | 8ms(Typ.)  |  |  |
|                                 | Display Colors                 | 16.7M(True Display)<br>1.07B(Dithered 10bit)                                  | 16.7M(True Display)<br>1.07B(Dithered 10bit)   | 16.7M(True Display)<br>1.07B(Dithered 10bit)   | 16.7M(True Display)<br>1.07B(Dithered 10bit)   | 16.7M(True Display)<br>1.07B(Dithered 10bit)   |  |  |
|                                 | Color Gamut                    | 92% (DCI-P3, CIE 1976)  | 92% (DCI-P3, CIE 1976)   | 92% (DCI-P3, CIE 1976)   | 92% (DCI-P3, CIE 1976)   | 92% (DCI-P3, CIE 1976)   |  |  |
|                                 | Operation Hour                 | 24/7  | 24/7   | 24/7   | 24/7   | 24/7   |  |  |
|                                 | Display                        | Haze  | 44%  | 25%  | 25%  | 44%  | 44%  |  |
| Dynamic C/R                     |                                | MEGA  | MEGA   | MEGA   | MEGA   | MEGA   |  |  |
| V-Scanning Frequency            |                                | 30 ~ 81KHZ  | 30 ~ 81KHZ   | 30 ~ 81KHZ   | 30 ~ 81KHZ   | 30 ~ 81KHZ   |  |  |
| H-Scanning Frequency            |                                | 48 ~ 75HZ   | 48 ~ 75HZ  | 48 ~ 75HZ  | 48 ~ 75HZ  | 48 ~ 75HZ  |  |  |
| Sound                           | Speaker Type                   |   | Built in Speaker(10W +10W)   | Built in Speaker(10W +10W)   | Built in Speaker(10W +10W)   | Built in Speaker(10W +10W)   | Built in Speaker(10W +10W)   |  |
|                                 | Connectivity                   | INPUT   | RGB  | DVI-D, Display Port 1.2 (1)  | DVI-D, Display Port 1.2 (1)  | DVI-D, Display Port 1.2 (1)  | DVI-D, Display Port 1.2 (1)  | DVI-D, Display Port 1.2 (1)  |
| VIDEO                           |                                |   | HDMI 2.0 (2)   | HDMI 2.0 (2)   | HDMI 2.0 (2)   | HDMI 2.0 (2)   | HDMI 2.0 (2)   |  |
| HDCP                            |                                |   | HDCP2.2  | HDCP2.2  | HDCP2.2  | HDCP2.2  | HDCP2.2  |  |
| AUDIO                           |                                |   | Stereo mini Jack, DVI, HDMI/Audio(Common)  | Stereo mini Jack, DVI, HDMI/Audio(Common)  | Stereo mini Jack, DVI, HDMI/Audio(Common)  | Stereo mini Jack, DVI, HDMI/Audio(Common)  | Stereo mini Jack, DVI, HDMI/Audio(Common)  |  |
| USB                             |                                |   | USB 2.0 x 2  | USB 2.0 x 2  | USB 2.0 x 2  | USB 2.0 x 2  | USB 2.0 x 2  |  |
| OUTPUT                          |                                | RGB   | HDMI 2.0 (Loop-out)  | HDMI 2.0 (Loop-out)  | HDMI 2.0 (Loop-out)  | HDMI 2.0 (Loop-out)  | HDMI 2.0 (Loop-out)  |  |
|                                 |                                | VIDEO   | N/A  | N/A  | N/A  | N/A  | N/A  |  |
|                                 |                                | AUDIO   | Stereo Mini Jack   | Stereo Mini Jack   | Stereo Mini Jack   | Stereo Mini Jack   | Stereo Mini Jack   |  |
|                                 |                                | Power Out   | N/A  | N/A  | N/A  | N/A  | N/A  |  |
|                                 |                                | USB   | N/A  | N/A  | N/A  | N/A  | N/A  |  |
| EXTERNAL CONTROL                |                                | RS232C(in/out) thru stereo jack, RJ45   |  | RS232C(in/out) thru stereo jack, RJ45  | RS232C(in/out) thru stereo jack, RJ45  | RS232C(in/out) thru stereo jack, RJ45  | RS232C(in/out) thru stereo jack, RJ45  |  |
| EXTERNAL SENSOR                 |                                | IR  |  | IR   | IR   | IR   | IR   |  |
| Tuner                           |                                | N/A   |  | N/A  | N/A  | N/A  | N/A  |  |
| Power                           |                                | Type  |  | Internal   | Internal   | Internal   | Internal   | Internal   |
|                                 | Power Supply                   |   | AC100 - 240 V, 50/60 Hz  | AC100 - 240 V, 50/60 Hz  | AC100 - 240 V, 50/60 Hz  | AC100 - 240 V, 50/60 Hz  | AC100 - 240 V, 50/60 Hz  |  |
|                                 | Power Consumption              | Max[W/h]  | 110  | 170.5  | 143  | 181.5  | 231  |  |
|                                 |                                | Typical[W/h]  | 74   | 117  | 108  | 131  | 178  |  |
|                                 |                                | Rating[W/h]   | 100  | 155  | 130  | 165  | 210  |  |
|                                 |                                | BTU(Max)  | 375.1  | 581.4  | 487.6  | 618.9  | 787.7  |  |
|                                 |                                | Sleep mode  | 0.5  | 0.5  | 0.5  | 0.5  | 0.5  |  |
|                                 | Off mode                       | N/A   | N/A  | N/A  | N/A  | N/A  |  |  |
|                                 | Mechanical Spec                | Dimension(mm)   | Set  | 9675 x 5577 x 48.3   | 11214 x 6439 x 46.3  | 12351 x 7079 x 46.3  | 14539 x 8310 x 46.3  | 16811 x 9601 x 49.7  |
|                                 |                                |   | Package  | 1095 x 676 x 151   | 1269 x 784 x 152   | 1402 x 858 x 163   | 1611 x 973 x 185   | 1871 x 1127 x 223  |
| Weight (kg)                     |                                | Set   | 10   | 13.4   | 18.1   | 24.9   | 38.3   |  |
|                                 |                                | Package   | 13.3   | 17.6   | 23.6   | 33.3   | 49   |  |
| VESA Mount                      |                                | 200 x 200   |  | 200 x 200  | 200 x 200  | 400 x 400  | 400 x 400  |  |
| Protection Glass                |                                | N/A   |  | N/A  | N/A  | N/A  | N/A  |  |
| Stand Type                      |                                | Foot Stand (Optional)   |  | Foot Stand (Optional)  | Foot Stand (Optional)  | No   | No   |  |
| Bezel Width (Top/Side/Bot) (mm) |                                | 9.2mm(U/L/R), 11.2mm(B)   |  | 9.2mm(U/L/R), 11.2mm(B)  | 9.2mm(U/L/R), 11.2mm(B)  | 9.2mm(U/L/R), 11.2mm(B)  | 11.5mm(U/L/R), 12.5mm(B)   |  |
| Operation                       | Operating Temperature          | 0°C - 40°C  |  | 0°C - 40°C   | 0°C - 40°C   | 0°C - 40°C   |  |  |
|                                 | Humidity                       | 10-80%  |  | 10-80%   | 10-80%   | 10-80%   |  |  |
| Feature                         | Key                            | UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 |  | UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0  | UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0  | UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0  | UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0  |  |
|                                 |                                | Special   | H/W  | Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x Rating, Wi-Fi/BT | Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x Rating, Wi-Fi/BT | Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x Rating, Wi-Fi/BT | Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x Rating, Wi-Fi/BT | Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x Rating, Wi-Fi/BT |
|                                 |                                |   | S/W  | Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)  | Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)  | Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)  | Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)  | Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)  |
|                                 | Processor                      | Coretex A72 1.7GHz Quad-Core CPU  |  | Coretex A72 1.7GHz Quad-Core CPU   | Coretex A72 1.7GHz Quad-Core CPU   | Coretex A72 1.7GHz Quad-Core CPU   | Coretex A72 1.7GHz Quad-Core CPU   |  |
|                                 |                                | On-Chip Cache Memory  | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB  |  | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB  | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB  | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB  | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB  |
|                                 | Internal Player (Embedded H/W) | Clock Speed   | 1.7GHz   |  | 1.7GHz   | 1.7GHz   | 1.7GHz   |  |
|                                 |                                | Main Memory Interface   | LPDDR4 1.5GHz 64bit  |  | LPDDR4 1.5GHz 64bit  | LPDDR4 1.5GHz 64bit  | LPDDR4 1.5GHz 64bit  |  |
|                                 |                                | Graphics  | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)                             |  | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)   | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)   | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)   | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)   |
|                                 |                                | Storage (FDM)   | 8GB (3.88GB Occupied by O/S, 412GB Available)  |  | 8GB (3.88GB Occupied by O/S, 412GB Available)  | 8GB (3.88GB Occupied by O/S, 412GB Available)  | 8GB (3.88GB Occupied by O/S, 412GB Available)  | 8GB (3.88GB Occupied by O/S, 412GB Available)  |
|                                 |                                | Multimedia  | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9<br>*Audio Decoder : AC3 (DD), MPEG |  | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9<br>*Audio Decoder : AC3 (DD), MPEG                                   | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9<br>*Audio Decoder : AC3 (DD), MPEG                                   | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9<br>*Audio Decoder : AC3 (DD), MPEG                                   | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9<br>*Audio Decoder : AC3 (DD), MPEG                                   |
|                                 |                                |   | IO Ports   | USB 2.0  |  | USB 2.0  | USB 2.0  | USB 2.0  |
|                                 | Operating System               | Tizen 4.0 (VDLinux)   |  | Tizen 4.0 (VDLinux)  | Tizen 4.0 (VDLinux)  | Tizen 4.0 (VDLinux)  | Tizen 4.0 (VDLinux)  |  |
|                                 | Certification                  | Safety  | 60950-1  |  | 60950-1  | 60950-1  | 60950-1  |  |
|                                 |                                | EMC   | Class B  |  | Class B  | Class B  | Class B  |  |
| Environment                     |                                | ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)                                |  | ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)   | ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)   | ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)   | ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)   |  |
| Accessories                     | Included                       | Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries    |  | Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries   | Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries   | Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries   | Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries   |  |
|                                 |                                | Optional  | Stand  | STN-L4355F   |  | STN-L4355F   | No   | No   |
|                                 |                                |   | Mount  | WMN4070SE (Land Only)  |  | WMN4070SE (Land Only)  | WMN4277SE (Land Only)  | WMN4277SE (Land Only)  |
|                                 |                                |   | Specialty  | CML400XK   |  | CML400XK   | CML450K  | CML450K  |
| Media Player                    | N/A                            |   | N/A  | N/A  | N/A  | N/A  |  |  |

# Specifications

| Model                           |                                |  | QM85R  | QM98T   |
|---------------------------------|--------------------------------|--|--|---|
| Panel                           | Diagonal Size                  | Class  | 85   | 98  |
|                                 |                                | Measured                                     | 84.5   | 97.5  |
|                                 | Type                           | Edge LED BLU                                 | Direct LED BLU   |   |
|                                 | Resolution                     | UHD (3840 x 2160)                            | UHD (3840 x 2160)  |   |
|                                 | Pixel Pitch (mm)               | 0.4875 x 0.4875                              | 0.562 x 0.562 (mm)   |   |
|                                 | Active Display Area            | 1872.0(H) x 1053.01(V)                       | 2158.848(H) x 1214.352(V)  |   |
|                                 | Brightness(Typ.)               | 500  | 500  |   |
|                                 | Contrast Ratio (Typ.)          | 4000:1                                       | 1200:1   |   |
|                                 | Viewing Angle(H/V)             | 178/178                                      | 178/178  |   |
|                                 | Response Time (G to G)         | 8ms(Typ.)                                    | 8ms(Typ.)  |   |
|                                 | Display Colors                 | 16.7M(True Display)<br>1.07B(Dithered 10bit) | 16.7M(True Display)<br>1.07B(Dithered 10bit)   |   |
|                                 | Color Gamut                    | 92% (DCI-P3, CIE1976)                        | 72%  |   |
|                                 | Operation Hour                 | 24/7   | 24/7   |   |
|                                 | Haze                           | 28%  | 25%  |   |
| Display                         | Dynamic C/R                    |  | MEGA   | MEGA  |
|                                 | H-Scanning Frequency           |  | 30 ~ 81kHz   | 30 ~ 81kHz  |
|                                 | V-Scanning Frequency           |  | 48 ~ 75Hz  | 48 ~ 75Hz   |
|                                 | Maximum Pixel Frequency        |  | 594MHz   | 594MHz  |
| Sound                           | Speaker Type                   |  | Built in Speaker(10W + 10W)  | Built in Speaker(10W + 10W)   |
| Connectivity                    | INPUT                          | RGB  | DVI-D, Display Port1.2 (1)   | DVI-D, Display Port1.2 (1)  |
|                                 |                                | VIDEO  | HDMI 2.0 (2)   | HDMI 2.0 (2)  |
|                                 |                                | HDCP   | HDCP2.2  | HDCP2.2   |
|                                 |                                | AUDIO  | Stereo mini Jack, DVI, HDMI/Audio(Common)  | Stereo mini Jack, DVI, HDMI   |
|                                 |                                | USB  | USB 2.0 x 2  | USB 2.0 x 2   |
|                                 | OUTPUT                         | RGB  | HDMI 2.0 (Loop-out)  | HDMI 2.0 (Loop-out)   |
|                                 |                                | VIDEO  | N/A  | N/A   |
|                                 |                                | AUDIO  | Stereo mini Jack   | Stereo mini Jack  |
|                                 |                                | Power Out                                    | N/A  | N/A   |
|                                 |                                | USB  | N/A  | N/A   |
|                                 | EXTERNAL CONTROL               |  | RS232C(in/out) thru stereo jack, RJ45  | RS232C(in/out) thru stereo jack, RJ45   |
|                                 | EXTERNAL SENSOR                |  | IR   | IR  |
|                                 | Tuner                          |  | N/A  | N/A   |
|                                 | Power                          | Type   |  | Internal  |
| Power Supply                    |                                | AC100 - 240 V, 50/60 Hz                      | AC100 - 240 V, 50/60 Hz  |   |
| Power Consumption               |                                | Max[W/h]                                     | 308  | 616   |
|                                 |                                | Typical[W/h]                                 | 217  | 414   |
|                                 |                                | Rating[W/h]                                  | 280  | 560   |
|                                 |                                | BTU(Max)                                     | 1050.3   | 2101.9  |
|                                 |                                | Sleep mode                                   | 0.5  | 0.5   |
| Off mode                        | N/A                            | N/A  |  |   |
| Mechanical Spec                 | Dimension(mm)                  | Set  | 1897.8 x 1080.8 x 56.7   | 2195.8 x 1250.8 x 96.5  |
|                                 |                                | Package                                      | 2090 x 1247 x 260  | 2369 x 1405 x 350   |
|                                 | Weight (kg)                    | Set  | 48.4   | 83  |
|                                 |                                | Package                                      | 63.7   | 106   |
|                                 | VESA Mount                     |  | 600 x 400  | 800 x 400   |
|                                 | Protection Glass               |  | N/A  | N/A   |
|                                 | Stand Type                     |  | N/A  | N/A   |
| Bezel Width (Top/Side/Bot) (mm) |                                | 10.9mm(U/L/R), 12.9mm(B)                     | 17.9   |   |
| Operation                       | Operating Temperature          |  | 0°C~ 40°C  | 0°C~ 40°C   |
|                                 | Humidity                       |  | 10~80%   | 10~80%  |
| Feature                         | Key                            |  | UHD Signage Display<br>Slim & Light Signage with<br>Built-in MagicInfo S6, SSSP 6.0  | UHD Signage Display<br>Slim & Light Signage with<br>Built-in MagicInfo S6, SSSP 6.0   |
|                                 | Special                        | H/W  | Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x Rating, Wi-Fi/BT | Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), Wi-Fi/BT |
|                                 |                                | S/W  | Auto Source Switching & Recovery,<br>LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)   | Auto Source Switching & Recovery,<br>LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)  |
|                                 | Internal Player (Embedded H/W) | Processor                                    | Cortex A72 1.7GHz Quad-Core CPU  | Cortex A72 1.7GHz Quad-Core CPU   |
|                                 |                                | On-Chip Cache Memory                         | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB  | L1 Instruction Cache : 48KB<br>L1 Data Cache : 32KB<br>L2 Cache : 2MB   |
|                                 |                                | Clock Speed                                  | 1.7GHz   | 1.7GHz  |
|                                 |                                | Main Memory Interface                        | 2.5GB<br>LPDDR41.5GHz 64bit  | 2.5GB<br>LPDDR41.5GHz 64bit   |
|                                 |                                | Graphics                                     | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)   | Graphic resolution : 1920x1080<br>Output resolution : 3840x2160 (Scale up from graphic processing result.)  |
|                                 |                                | Storage (FDM)                                | 8GB<br>(3.88GB Occupied by O/S, 4.12GB Available)  | 8GB<br>(3.88GB Occupied by O/S, 4.12GB Available)   |
|                                 |                                | Multimedia                                   | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG                                      | *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG                         |
|                                 |                                | IO Ports                                     | USB 2.0  | USB 2.0   |
| Operating System                |                                | Tizen 4.0 (VDLinux)                          | Tizen 4.0 (VDLinux)  |   |
| Certification                   | Safety                         |  | 60950-1  | 60950-1   |
|                                 | EMC                            |  | Class A  | Class A   |
|                                 | Environment                    |  | N/A  | N/A   |
|                                 | Security                       |  | 802.1x(WPA2 Enterprise) (201-)<br>: EAP-TLS, EAP-TTLS, EAP-PEAP<br>Quick Setup Guide, Warranty Card,<br>Power Cord, Remote Controller, Batteries                         | 802.1x(WPA2 Enterprise)<br>: EAP-TLS, EAP-TTLS, EAP-PEAP<br>Quick Setup Guide, Warranty Card,<br>Power Cord, Remote Controller, Batteries                   |
| Accessories                     | Included                       |  | N/A  | N/A   |
|                                 | Optional                       | Stand  | N/A  | N/A   |
|                                 |                                | Mount  | WMN8200SF / WMN8200SG  | WMN8200SG   |
|                                 |                                | Specialty                                    | N/A  | N/A   |
| Media Player                    |                                | N/A  | N/A  |   |





For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**